





www.idn-inc.com


Standard Hollow Metal Door Hinge Location Chart (1³/₄" Doors)

Top of Door to Top of Each Hinge

Measure from the top of the door to the top of each hinge cut-out

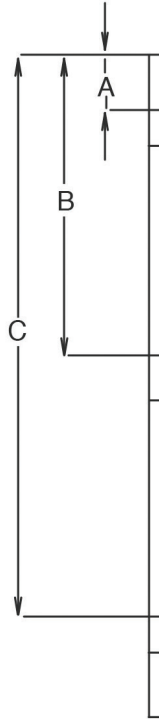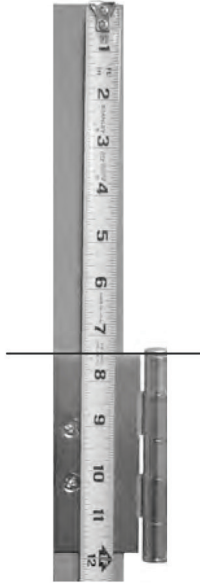

Standard Weight
.134
4¹/₂" Hinges

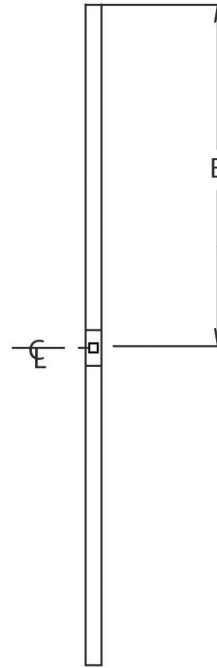

Measure from the top of the door to the centerline of the lock cut-out

Note:
8'0" doors have a 4th hinge;
bottom hinge = D
(not shown in drawing)

| | 6'8" | | | | 7'0" | | | | 8'0" | | | | |
|--------------|---------------------------------|-----------------------------------|----------------------------------|-----------------------------------|---------------------------------|-----------------------------------|----------------------------------|-----------------------------------|---------------------------------|------------------------------------|------------------------------------|-----------------------------------|-----------------------------------|
| Manufacturer | A | B | C | E | A | B | C | E | A | B | C | D | E |
| AMWELD | 7 ³ / ₈ " | 37 ⁵ / ₁₆ " | 67 ¹ / ₄ " | 39 ⁹ / ₁₆ " | 7 ³ / ₈ " | 39 ⁵ / ₁₆ " | 71 ¹ / ₄ " | 43 ⁹ / ₁₆ " | 7 ³ / ₈ " | 32 ¹¹ / ₁₆ " | 58" | 83 ⁵ / ₁₆ " | 55 ⁹ / ₁₆ " |
| CECO | 6 ⁵ / ₈ " | 37 ⁵ / ₈ " | 68 ⁵ / ₈ " | 38 ¹ / ₁₆ " | 6 ⁵ / ₈ " | 39 ⁵ / ₈ " | 72 ⁵ / ₈ " | 42 ¹ / ₁₆ " | 6 ⁵ / ₈ " | 32 ⁵ / ₈ " | 58 ⁵ / ₈ " | 84 ⁵ / ₈ " | 54 ¹ / ₁₆ " |
| CURRIES | 4 ⁷ / ₈ " | 35 ¹ / ₈ " | 65 ³ / ₈ " | 39 ⁷ / ₈ " | 4 ⁷ / ₈ " | 37 ¹ / ₈ " | 69 ³ / ₈ " | 43 ⁷ / ₈ " | 4 ⁷ / ₈ " | 30 ³ / ₈ " | 55 ⁷ / ₈ " | 81 ³ / ₈ " | 55 ⁷ / ₈ " |
| DAYBAR | 7 ³ / ₈ " | 37 ⁵ / ₁₆ " | 67 ¹ / ₄ " | 39 ⁹ / ₁₆ " | 7 ³ / ₈ " | 39 ⁵ / ₁₆ " | 71 ¹ / ₄ " | 43 ⁹ / ₁₆ " | 7 ³ / ₈ " | 32 ²¹ / ₃₂ " | 57 ¹⁵ / ₁₆ " | 83 ¹ / ₄ " | 55 ⁹ / ₁₆ " |
| DKS | 7 ³ / ₈ " | 37 ⁵ / ₁₆ " | 67 ¹ / ₄ " | 39 ⁹ / ₁₆ " | 7 ³ / ₈ " | 39 ⁵ / ₁₆ " | 71 ¹ / ₄ " | 43 ⁹ / ₁₆ " | 7 ³ / ₈ " | 32 ¹¹ / ₁₆ " | 58" | 83 ⁵ / ₁₆ " | 55 ⁹ / ₁₆ " |
| FENESTRA | 5 ¹ / ₈ " | 35 ¹ / ₈ " | 65 ¹ / ₈ " | 39 ⁹ / ₁₆ " | 5 ¹ / ₈ " | 37 ¹ / ₈ " | 69 ¹ / ₈ " | 43 ⁹ / ₁₆ " | 5 ¹ / ₈ " | 30 ¹ / ₂ " | 55 ¹³ / ₁₆ " | 81 ¹ / ₈ " | 55 ⁹ / ₁₆ " |
| KEWANEE | 7 ¹ / ₄ " | 37 ⁵ / ₁₆ " | 67 ³ / ₈ " | 39 ⁹ / ₁₆ " | 7 ¹ / ₄ " | 39 ⁵ / ₁₆ " | 71 ³ / ₈ " | 43 ⁹ / ₁₆ " | 7 ¹ / ₄ " | 32 ⁵ / ₈ " | 58" | 83 ³ / ₈ " | 55 ⁹ / ₁₆ " |
| MESKER | 4 ⁷ / ₈ " | 35 ¹ / ₈ " | 65 ³ / ₈ " | 39 ⁹ / ₁₆ " | 4 ⁷ / ₈ " | 37 ¹ / ₈ " | 69 ³ / ₈ " | 43 ⁹ / ₁₆ " | 4 ⁷ / ₈ " | 30 ³ / ₈ " | 55 ⁷ / ₈ " | 81 ³ / ₈ " | 55 ⁹ / ₁₆ " |
| PIONEER | 4 ⁷ / ₈ " | 35 ¹ / ₈ " | 65 ³ / ₈ " | 41 ⁷ / ₈ " | 4 ⁷ / ₈ " | 37 ¹ / ₈ " | 69 ³ / ₈ " | 45 ⁷ / ₈ " | 4 ⁷ / ₈ " | 30 ³ / ₈ " | 55 ⁷ / ₈ " | 81 ³ / ₈ " | 57 ⁷ / ₈ " |
| REPUBLIC | 7 ³ / ₈ " | 37 ⁵ / ₁₆ " | 67 ¹ / ₄ " | 39 ⁹ / ₁₆ " | 9 ³ / ₈ " | 39 ⁵ / ₁₆ " | 69 ¹ / ₄ " | 43 ⁹ / ₁₆ " | 4 ⁷ / ₈ " | 30 ³ / ₈ " | 55 ⁷ / ₈ " | 81 ³ / ₈ " | 55 ⁹ / ₁₆ " |
| STEELCRAFT | 7 ³ / ₈ " | 37 ⁵ / ₁₆ " | 67 ¹ / ₄ " | 39 ⁹ / ₁₆ " | 7 ³ / ₈ " | 39 ⁵ / ₁₆ " | 71 ¹ / ₄ " | 43 ⁹ / ₁₆ " | 7 ³ / ₈ " | 32 ²¹ / ₃₂ " | 57 ¹⁵ / ₁₆ " | 83 ¹ / ₄ " | 55 ⁹ / ₁₆ " |

Standard undercut on all doors is 3/4" with the exception of Curries and Pioneer, which is 5/8"